Eaton Industries Pty Ltd
ABN 66 103 014 571
10 Kent Road
Mascot, NSW Australia 2020
www.eaton.com/powerquality
1300 UPS UPS (1300 877 877)

ER61042 Castor Kit

Features

- Load rate up to 275 kg per castor
- Mounts direct to bottom frame
- 360 degree swivel
- RoHS compliant
- Conforms to ASTM D160-01 and ASTM B117 (500 hours salt spray test)

Material / Finish

- High grade cold rolled steel 3.0mm thickness
- Powder coat finish preceded by 5 stage iron phosphate pre-treatment
- Standard colour is low gloss black.

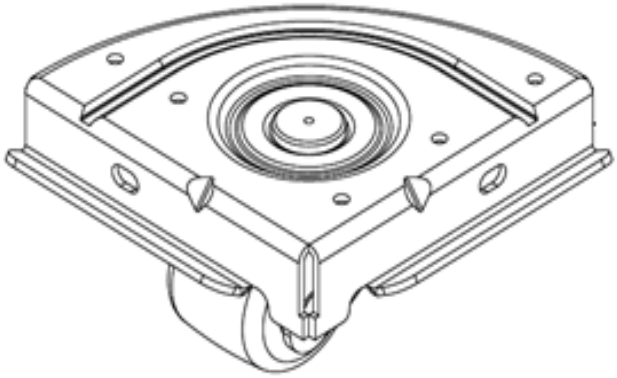

Part List

Description	Qty
1. Castor Plate	4
2. Wheels	4
3. Caged Nut	16
4. T-30 screw M6x12	8
5. Flat Washer	8
6. Spring Washer	8

Part Number	Part Description
ERA003	E61042 Castor Kit

© 2013 Eaton, All Rights Reserved

Dimensions (in mm.)

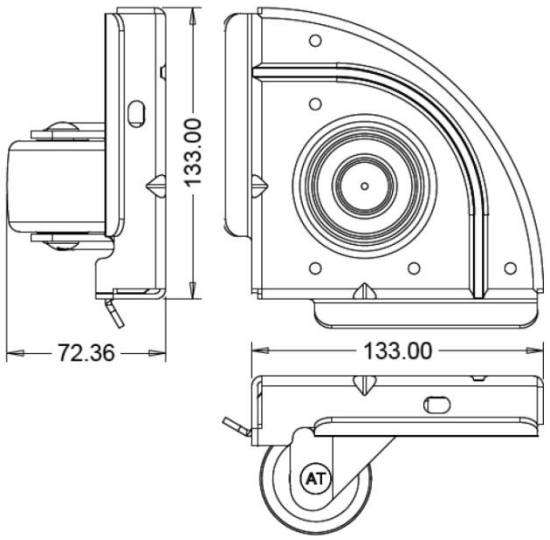

Installation

1. Remove all side panel, front and rear door from the rack.
2. Lay down the rack on the floor.
3. Install four castors at the four corner of the rack.
4. Fix castor to frame bottom with Hex screw M6 two pieces on each castor.
5. Tighten with torque 75-90 inch lbs.

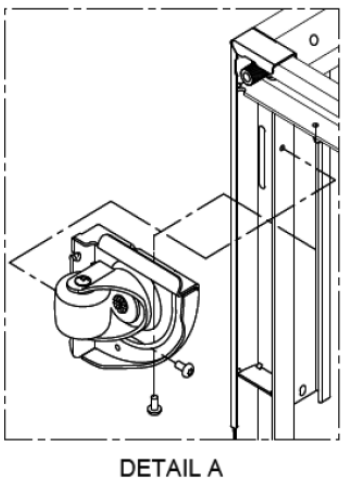

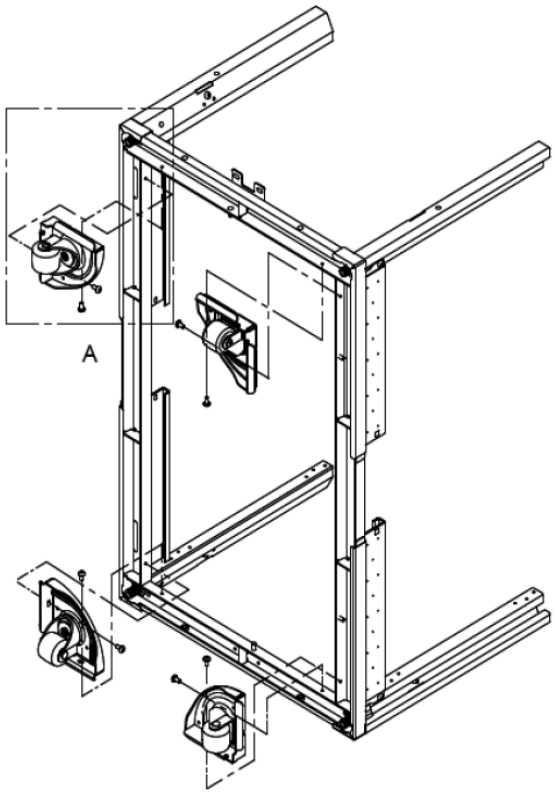

Note: Torque 75-90 inch lbs

© 2013 Eaton, All Rights Reserved